
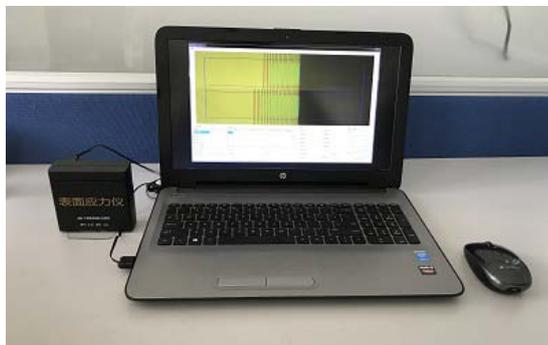


## JF-2 series Surface Stress Meter

The JF-2 series are developed for measuring the surface stress of chemical tempered glass.

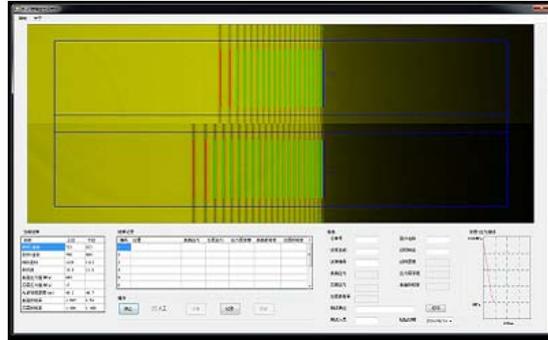

### Feature:

- Comply with ASTM C1422M
- Easy operation
- Small size
- No adjustment part
- Manual operation in case of bad image

### Specification:

- Refractive Index: 1.47~1.53( other RI range customized according to requirement)
- Stress :1000MPa
- Depth: 100um
- Accuracy: 20 Mpa/5um
- Light source: 590/750 nm
- Operation System: JF-2E integrated PDA or JF-2 PC software (Windows 7 with dot net fame work 3.5 or about)
- Weight: 0.3kg/0.5kg(with PDA)

### Contact:

Contact Person: Jeff Li  
Tel: +86 153 2112 8188  
Add: Room 225, Building 1, Jimenli Community, Haidian district, Beijing, China.

Email: [jeffoptics@hotmail.com](mailto:jeffoptics@hotmail.com)  
Web: [www.jeffoptics.com](http://www.jeffoptics.com)